


Main Characteristics

- Heat-sealable on non-metallized side from 105°C
- Metallized surface indicated for printing;
- High stiffness and low stretching;
- Metallized cavitated ultra-high opacity film;
- Excellent performance in high-speed labeling machines.

Typical Applications

- Continuous labels (WAL Roll Fed), laminate or monolayers;
- Decorative applications in general..

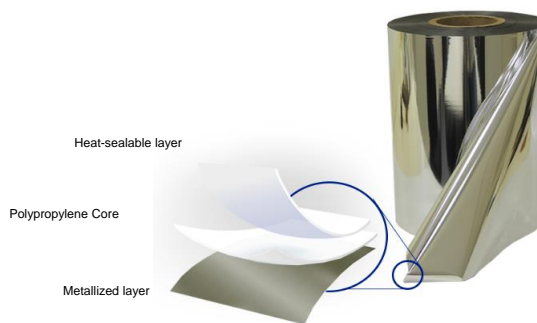

Properties	Methodology	Unit	Range	20TBM	22TBM	26TBM	
Physical Properties							
Nominal Thickness	DIN 53370	µm	Target	26.7	29.3	34.7	
			Min.	25.3	27.9	32.9	
			Max.	28.0	30.8	36.4	
		Gauge	Target	105.0	115.5	136.5	
			Min.	99.7	109.7	129.7	
			Max.	110.2	121.3	143.3	
Unit Weight	ASTM D 4321	g/m ²	Target	20.0	22.0	26.0	
			Min.	19.0	20.9	24.7	
			Max.	21.0	23.1	27.3	
		lb/ream	Target	12.3	13.5	16.0	
			Min.	11.7	12.8	15.2	
			Max.	12.9	14.2	16.8	
Yield	ASTM D 4321	m ² /kg	Target	50.0	45.5	38.5	
			Min.	47.6	43.3	36.6	
			Max.	52.6	47.8	40.5	
		in ² /lb	Target	35154	31958	27041	
			Min.	33480	30436	25753	
			Max.	37004	33640	28464	
Surface Treatment	ASTM D 2578	dinas/cm	Target	NA			
			Min.	NA			
Coefficient of Friction	NT	ASTM D 1894	-	Target	0.30		
				Min.	0.20		
				Max.	0.40		
Optical Properties							
Optical Density	-	%	Target	≥ 2.0			
Mechanical Properties							
Tensile Strength	MD	ASTM D 882	N/mm ²	Target	80		
	TD			140			
	MD		lbf/in ²	Target	11603		
	TD			20305			
Elongation at Break	MD	ASTM D 882	%	Target	120		
	TD			40			
Shrinkage	MD	ASTM D 1204	%	Target	3		
	TD			1			
Sealing Range	NT	ASTM F 88	°C	Target	105 - 130		
			°F	Target	221 - 266		
Sealing Strength	NT	ASTM F 88	g/25mm or gf/in	Target	400	500	600
				Min.	350		
Barrier Properties							
TPVA 38°C / 90%UR	ASTM F 1249	g H ₂ O / (m ² .dia)	Target	≤ 2,6	≤ 2,5	≤ 2,2	
WVTR 100°F / 90%RH	ASTM F 1249	g H ₂ O / (100in ² .day)	Target	≤ 0.17	≤ 0.16	≤ 0.14	
TPO ₂ 23°C / 0%UR	ASTM D 3985	cm ³ O ₂ / (m ² .dia)	Target	≤ 270	≤ 260	≤ 230	
OTR 73°F / 0%RH	ASTM D 3985	cm ³ O ₂ / (100in ² .day)	Target	≤ 17.4	≤ 16.7	≤ 14.8	

1. Acronyms:
MD: Machine Direction | TD: Transverse Direction;
NT: Non Treated Layer | T: Treated Layer;
WAL: Wrap Around Label.

2. Additional:
The restrained information in this datasheet represent typical data, and does not constitute genuine warranty liability as far as the product process and or application. In case of doubts or development of other thicknesses or applications, consult your dealer or send e-mail to: contato@polofilms.com.br.

Notes:

The use of metallized films in the conversion process is recommended within a maximum period of 2 months from the billing date, in order to minimize the risk of loss of integrity of the metal layer and damage to the barrier properties. Climatic conditions have a very relevant influence on the surface energy of the metallized face. Therefore, we recommend the application of primer or corona treatment on the metallized face before printing or laminating with another substrate.

Food Contact Regulations

METAL Family films comply with Mercosul, ANVISA, FDA (Food and Drug Administration) and the European Community legislations for applications involving direct contact with food. Full details are provided in the Declaration of Conformity. Customers intending to use METAL Family films for applications intended to come into contact with food should request a copy of that document from POLO Films. The MSDS (Material Safety Data Sheet), as well as the evaluation of conformity for contact with food from other legislations are also available upon request. Contact your dealer for any questions.

Storage and Transportation Terms & Conditions

All products are stored and transported in dry, covered and clean environments. It is recommended that storage and transportation take place at temperature around 30°C and 60% relative humidity.

If the temperature and humidity are not as recommended, the following issues may occur:
 - Decreased level of surface treatment, leading to printing and/or lamination difficulties;
 - Decreased film transparency;
 - Too low CoF, making processing and machinability difficult.


BOPP films are recommended to be kept at operating room temperature for 24 hours before use.

Dimensional Specifications / Product Validity

Width	Minimum: 0 mm Maximum: 2 mm (from standard width)
Outer Diameter*	Minimum: 30 mm Maximum: 20 mm (from standard diameter)
Core	Minimum: 1 mm Maximum: 1 mm (from standard diameter)
Splices per roll	Maximum: 2
% of Splices per order	Maximum: 30%
Shelf Life (after production)	6 months

* For other dimensional information, consult your dealer.

Polo Films Nomenclature

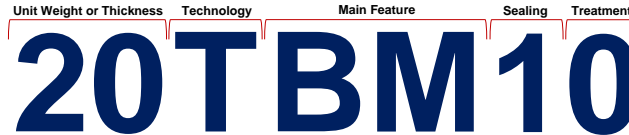

Unit Weight/ Thickness

Expressed in g/m². Used for white/opaque films;
 Expressed in µm. Used for transparent, matte and metallized films.

Technology

T - Tenter | C - Cast | P - BOPET.

Main Feature

BM - Heat-sealable White for printing and/or lamination.

Specialty

Not applicable.

Sealing

0 - Not Sealable;
 1 - Sealing on the Inner Face;
 2 - Sealing on the Outer Face;
 3 - Sealing on both Sides.

Treatment

0 - No Treatment;
 1 - Treatment on Inner Face;
 2 - Treatment on Outer Face;
 3 - Treatment on both Sides.